



LB SERIES SLIMLINE MANUAL 240 V SUBMERSIBLE PUMP



SINGLE PHASE SUBMERSIBLE PUMP · 250 L/MIN · 11 M HEAD

124 LB-480

BARCODE: 9346472030550




The LB/LB-A series are submersible single-phase portable drainage pumps. The discharge direction is selectable between vertical and inclined to prevent folding or bending of the discharge hose. Every LB-series is slim design enough to be accommodated in an 8-inch pipe. The LB-A series with an innovative electrode-type relay unit automatically starts and stops the pump to eliminate dry-running.

FEATURES

- Anti wicking cable offers maximum protection against water penetrating through the cable entry should the cable be damaged extending the life of your pump.
- 50 mm discharge direction that is selectable between vertical or inclined.
- Thermal motor protector
- Dual mechanical seals with silicon carbide face provides 5 times higher corrosion wear and heat resistance than tungsten carbide.
- Tsurumi original design oil lifter prolonging seal life

SPECIFICATIONS

- **Maximum Flow:** 250 L/min
- **Max Head:** 11 m
- **Motor Type:** 240 V - 0.48 kW
- **Discharge Bore:** 2"
- **Impeller Type:** Semi-vortex urethane rubber
- **Starting Method:** Capacitor run
- **Solids Passage:** 6 mm
- **Cable Length:** 10 m
- **Dimension:** 189 mm W x 286 mm H

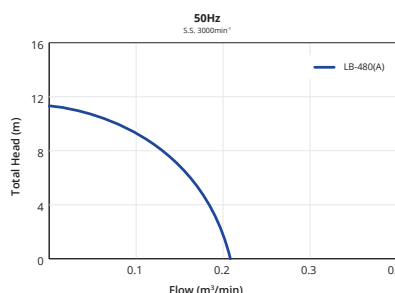

Part #	Type	Motor Type	Head	Discharge Size	Flow	Pump Weight:
124 LB-480	Manual	240 V - 0.48 kW	11 m	50 mm	0.25 m³/min (250 L/min)	10.4 kg
124 LB-480A	Automatic	240 V - 0.48 kW	11 m	50 mm	0.25 m³/min (250 L/min)	11 kg

RELATED PRODUCTS



124 LB-480A

LB SLIMLINE
SERIES



124 HS2.4S

HS MANUAL
SERIES



124 HSZ2.4S

HSZ 240 V
AUTOMATIC
SERIES



124 LSC1.4S

LSC PUDDLE
SUCKER SERIES



124 KTVE21.5

KTVE AUTOMATIC
415 V SERIES